


MOORESTYLE™

Alkyd Undercoat

572

A superior quality, smooth flowing alkyd-based undercoat for use on wood. It is also used in the preparation of plaster walls. Easy sanding, high opacity and good hold-out combine to make it ideal for use under both acrylic and enamel Wood & Metal topcoats. Formulated without lead.

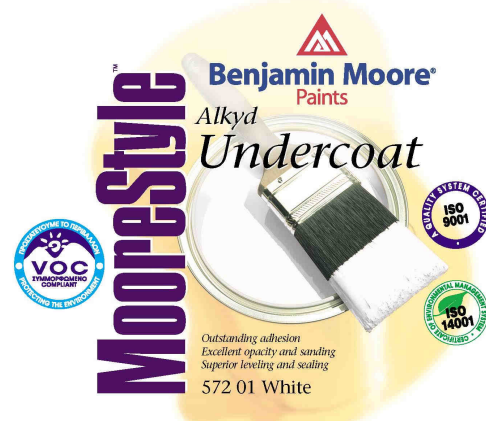


Performance Features

- Excellent hiding.
- Sands easily.
- Gives a smooth surface for a quality finish.
- Use on interior or exterior surfaces.
- Suitable for high use or commercial areas.

Colors: White. May be tinted with Moor-O-Matic colorants to light colors for additional hiding.

Toxicity: Formulated without lead or mercury.

Gloss Level: Flat.



Performance Guide:

Weather Resistance

Excellent when topcoated with Benjamin Moore exterior finishes.

Heat Resistance

Up to 120°C. Continuous heat will cause premature yellowing and embrittlement.

Water Resistance

Good resistance to water and condensation.

Solvent Resistance

Good resistance to aliphatic solvents and alcohols. Sensitive to aromatic hydro carbons and other strong solvents.



VOC (Volatile Organic Compounds): 572 MOORESTYLE Alkyd Undercoat: belongs to the category A/g SB (Primers).
EU Limit: 350g/l (2010).

Spreading Rate

13 – 14 m²/L

Volume Solids

58%

Wet Film Thickness

77 micrometres

Dry Film Thickness

45 micrometres

Dry Time at 20°C

3 hours to touch
16 hours to recoat

Flexibility

Passes 3mm mandrel

Thinning

5% white spirits

For Application By

Brush, Roller, Spray

Surface Preparation

Surface to be painted must be free of all loose material such as dust and peeling paint. The surface must be clean with all traces of grease, oil and dirt removed. Remove loose material by scraping and sanding. Sand glossy surfaces to a dull finish.

Wood: Spot-prime all patched and filled areas. After drying, apply a full coat. Sand to a smooth surface before topcoating.

Plaster Walls: Apply one coat. Sand to a smooth surface before topcoating.

Application

Stir thoroughly before and during use. Apply by brush, roller or spray. Thin 5% with low odour white spirits. Do not apply when air or surface temperature is below 10°C or when the humidity is high. Drying times are longer under cool/moist conditions.

Clean Up:

Clean brushes and equipment with white spirits.

Precautions -

Health and Safety:

- Keep away from heat and open flame
- Repeated exposure may cause skin dryness or cracking
- Contains Methylenehexoxime. May produce an allergic reaction
- Avoid breathing vapour –use with adequate ventilation
- Skin contact: wash skin thoroughly with soap and water
- Eye contact: Treat immediately with water: Get medical attention
- If swallowed: Get medical attention without delay and display label.

Packaging and Storage

Sizes : 0,75litre, 2,5 litres

Flash Point: 44°C (Abel)

Storage: PAINTS, flammable liquid

